



**ALPI** / No.AR5

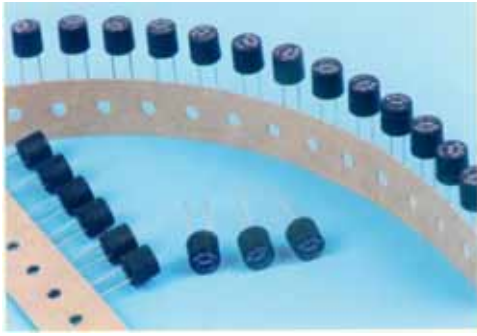

Dimensions (mm)

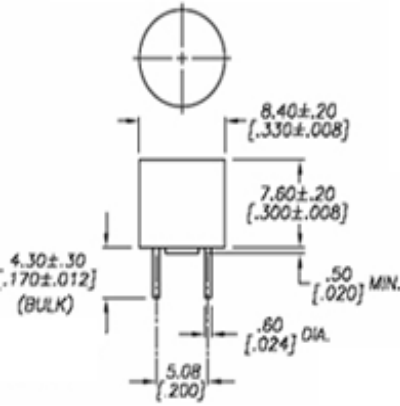

**Slo-BloType Fuse**

**Time-Current Characteristic**

Time Lag (T)

**Standard**

IEC 60127-3/ & DIN 41662

**Approvals**

- CCC
- VDE
- UL / CUL
- METI-PSE
- EK

**Dimensions (mm)**

8.4 × 8.1



**Packaging Specification**

Inner Box

W × D × H (mm) : 324 × 260 × 46

10,000 pcs Fuse Contained

Outer Box

W × D × H (mm) : 505 × 350 × 290

10,000pcs Fuse( = 10 pcs Inner Box) Contained

**Physical Specification**

**Materials**

Cap:Nylon #66(GF 0.0%,Inflammability UL 94-0)

Body: Nylon #66(GF 30%,Inflammability UL 94-0)

Terminals:Sn Plated Lead Wire (Square:0.45 × 0.54mm)

**Markings**

On Fuse Cap:Approval Logos & ALPI logo "ALPI"

&Rated Current / Voltage,etc.

Limits for Pre-arcing Time					
Rated Current	1.5 × IN	2.1 × IN	2.75 × IN	4 × IN	10 × IN
500mA-6.3 A	>1h	< 2 min	0.4s-10s	0.15s-3s	0.02s-0.15s



**Ordering Information:**

Rated Current	Amp Code	Voltage Rating	Breaking Capacity	Approvals				
				VDE	CCC	CUL	EK	PSE
AR 200500	500 MA	250V	30A/250V					
AR 200630	630 MA	250V	30A/250V					
AR200800	800 MA	250V	30A/250V					
AR 201000	1 A	250V	30A/250V					
AR 201250	1.25 A	250V	30A/250V					
AR 201600	1.6 A	250V	30A/250V					
AR 202000	2 A	250V	30A/250V					
AR 202500	2.5 A	250V	30A/250V					
AR 203150	3.15 A	250V	30A/250V					
AR 204000	4 A	250V	30A/250V					
AR205000	5 A	250V	30A/250V					
AR 206300	6.3 A	250V	30A/250V					

**SHENZHEN YIZAN ELECTRONICS CO., LTD.**

ADDRESS: 7H#, Fuhua Building,Fuyong Town, Baoan District ,Shenzhen City,Guangdong,China

TEL:086-0755-27333110 (16 Line)

FAX:086-0755-27383007 27333110-805

E-mail:szbide@126.com

Http://www.szyizan.com